



Division of Strength of Materials and Structures
Faculty of Power and Aeronautical Engineering



Finite element method (FEM1)


Lecture 6B. Requirements for the shape functions

03.2025

Requirements for the shape functions

- a) It allows to approximate a constant value of the function $\{u\}$ inside the finite element
- b) It ensures the continuity, on the boundary between finite elements, of the displacement function $\{u\}$ and its derivatives up to one order lower than the highest derivative of $\{u\}$ appearing in the total potential energy functional V .

If requirements a) and b) are satisfied, the approximate solution tends to the exact solution with increasing the number of degrees of freedom.

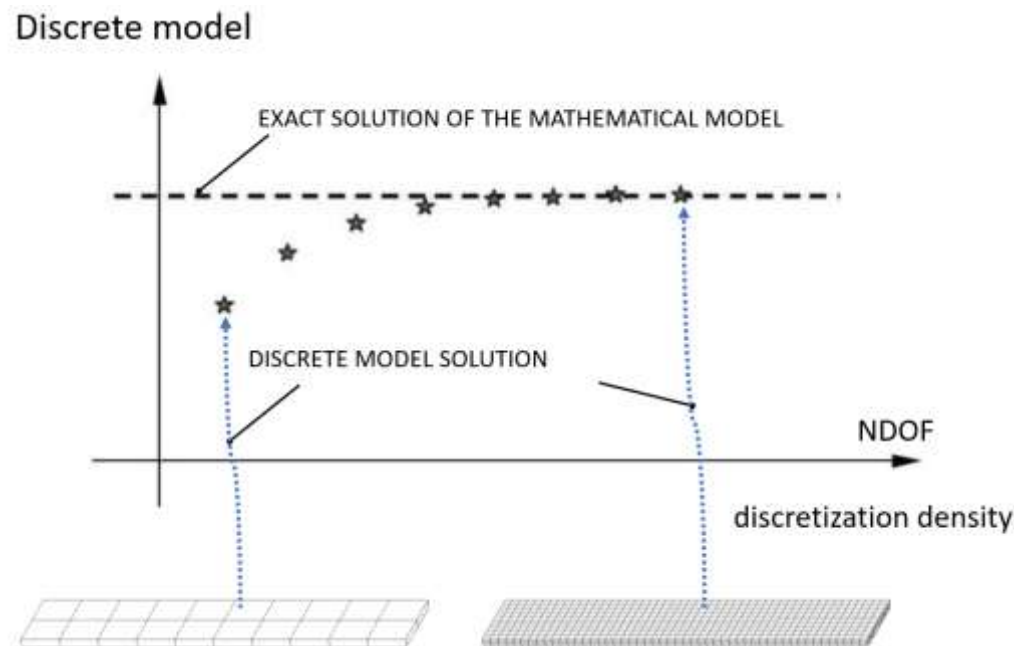


Example Check the requirements for the 4-node element shape functions

$$N_1(\xi, \eta) = \frac{1}{4}(1 - \xi)(1 - \eta)$$

$$N_2(\xi, \eta) = \frac{1}{4}(1 + \xi)(1 - \eta)$$

$$N_3(\xi, \eta) = \frac{1}{4}(1 + \xi)(1 + \eta)$$

$$N_4(\xi, \eta) = \frac{1}{4}(1 - \xi)(1 + \eta)$$

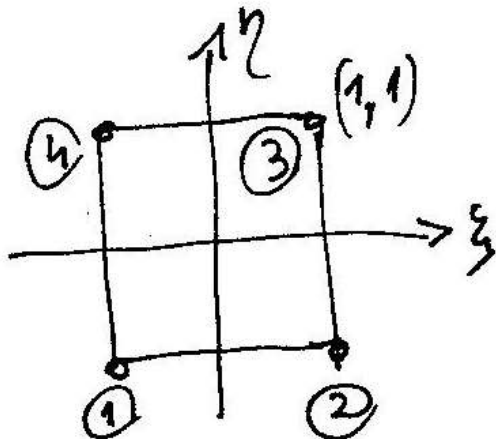


a)

$$u_i = u_0$$

$$v_i = v_0$$

$$i = 1, 2, 3, 4$$

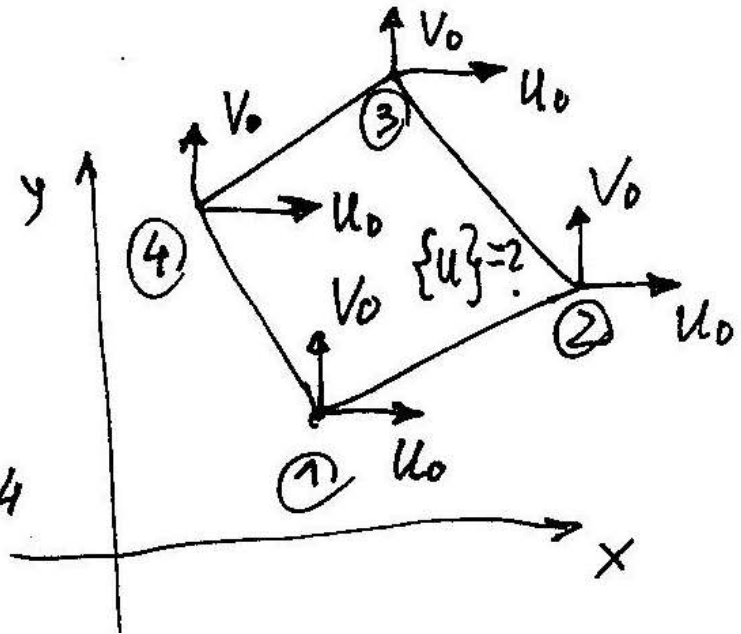

$$\begin{Bmatrix} u \\ v \end{Bmatrix}_{2 \times 1} = \begin{Bmatrix} u(x,y) \\ v(x,y) \end{Bmatrix} = \begin{bmatrix} N_1 & 0 & N_2 & 0 & N_3 & 0 & N_4 & 0 \\ 0 & N_1 & 0 & N_2 & 0 & N_3 & 0 & N_4 \end{bmatrix} \cdot \begin{Bmatrix} u_0 \\ v_0 \\ u_0 \\ v_0 \\ u_0 \\ v_0 \\ u_0 \\ v_0 \end{Bmatrix} =$$

$$= \begin{Bmatrix} (N_1 + N_2 + N_3 + N_4) u_0 \\ (N_1 + N_2 + N_3 + N_4) v_0 \end{Bmatrix} =$$

$$= \begin{Bmatrix} \frac{1}{4} \left((1-\xi)(1-\eta) + (1+\xi)(1-\eta) + (1+\xi)(1+\eta) + (1-\xi)(1+\eta) \right) \cdot u_0 \\ \frac{1}{4} (\dots) v_0 \end{Bmatrix} =$$

$$= \begin{Bmatrix} \frac{1}{4} \left((1-\xi+1+\xi)(1-\eta) + (1+\xi+1-\xi)(1+\eta) \right) u_0 \\ \frac{1}{4} (\dots) v_0 \end{Bmatrix} =$$

$$= \begin{Bmatrix} \frac{1}{4} \left(2(1-\eta) + 2(1+\eta) \right) u_0 \\ \frac{1}{4} (\dots) v_0 \end{Bmatrix} = \begin{Bmatrix} u_0 \\ v_0 \end{Bmatrix}$$

Condition a)
is met

$$V_e = U_e - W_e = \frac{1}{2} \int_{\Omega_e} \mathbf{L} \boldsymbol{\varepsilon} \mathbf{D} \boldsymbol{\varepsilon} d\Omega_e - \int_{\Omega_e} \mathbf{L} \mathbf{X} \{u\} d\Omega_e - \int_{\Gamma_{pe}} \mathbf{L} \mathbf{P} \{u\} d\Gamma_{pe}$$

\mathbf{L} 1×3 \mathbf{D} 3×3 $\boldsymbol{\varepsilon}$ 3×1 \mathbf{L} 1×2 \mathbf{X} 2×1 \mathbf{L} 1×2 \mathbf{P} 2×1


$$\mathbf{R} \{u\}$$


\mathbf{R} 3×2 $\{u\}$ 2×1

(The first order is the highest order of the derivative in the functional V)

Condition b) is satisfied if the function $\{u\}$ is continuous between elements

contains differential operators of the first order

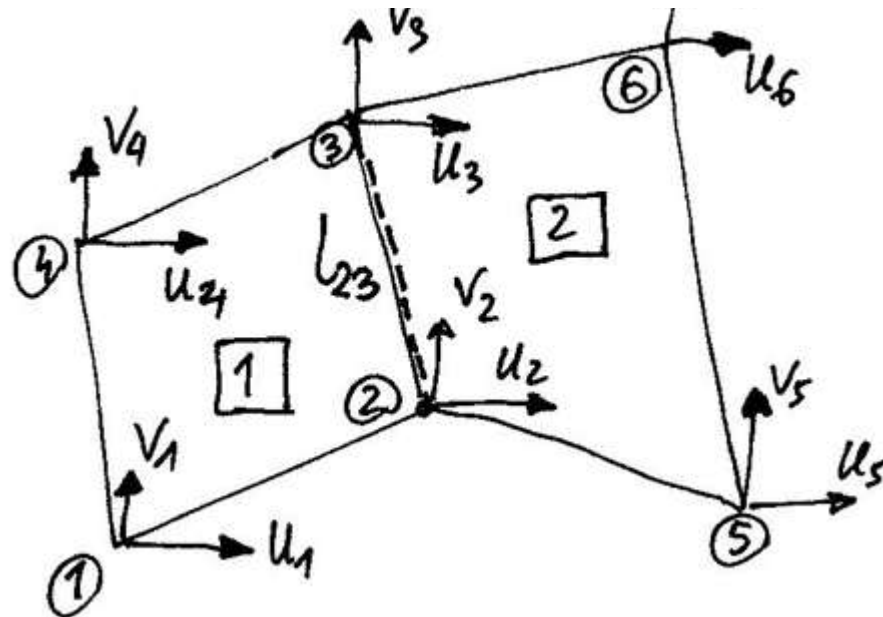

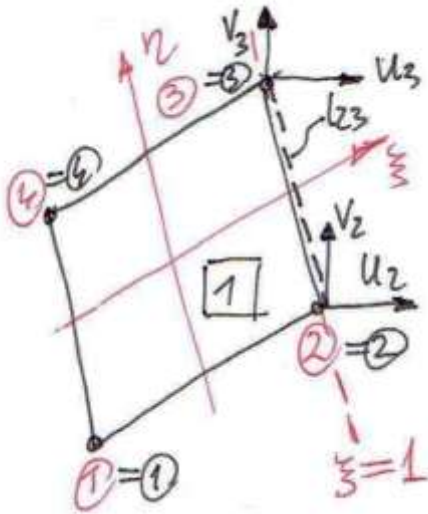

shape functions on the edge l_{23}

$$N_1 = 0, N_2 = \frac{1}{2}(1-\eta), N_3 = \frac{1}{2}(1+\eta), N_4 = 0$$

$$u \Big|_{23}^{[1]} = N_1 u_1 + N_2 u_2 + N_3 u_3 + N_4 u_4 =$$


$$= N_2 u_2 + N_3 u_3 = \frac{1}{2}((1-\eta)u_2 + (1+\eta)u_3)$$

$$v \Big|_{23}^{[1]} = \frac{1}{2}((1-\eta)v_2 + (1+\eta)v_3)$$

$$u \Big|_{23}^{[1]} = u \Big|_{23}^{[2]}$$

$$v \Big|_{23}^{[1]} = v \Big|_{23}^{[2]}$$

Condition b)
is met

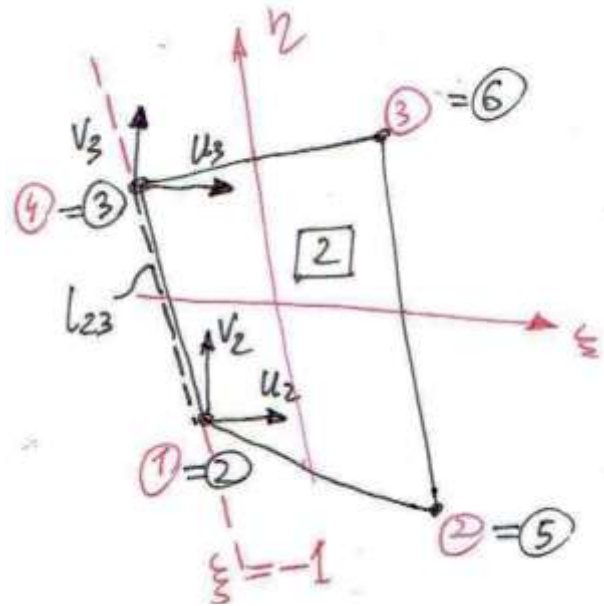

shape functions on the edge l_{23}

$$N_1 = \frac{1}{2}(1-\eta), N_2 = 0, N_3 = 0, N_4 = \frac{1}{2}(1+\eta)$$

$$u \Big|_{23}^{[2]} = N_1 u_2 + N_2 u_5 + N_3 u_6 + N_4 u_3 =$$

$$= N_1 u_2 + N_4 u_3 = \frac{1}{2}((1-\eta)u_2 + (1+\eta)u_3)$$

$$v \Big|_{23}^{[2]} = \frac{1}{2}((1-\eta)v_2 + (1+\eta)v_3)$$